


VIBRASORB



SW Pads

Our Vibrasorb SW Pads are the perfect solution to reduce noise, high frequency vibration and impact from various machinery.

Each pad consists of 81 modules which are easy to cut due to the thin webbing between them. The modules allow you to cut off exactly what is needed for your specific load rating. This design minimizes wastage as the off cuts can be re-used.

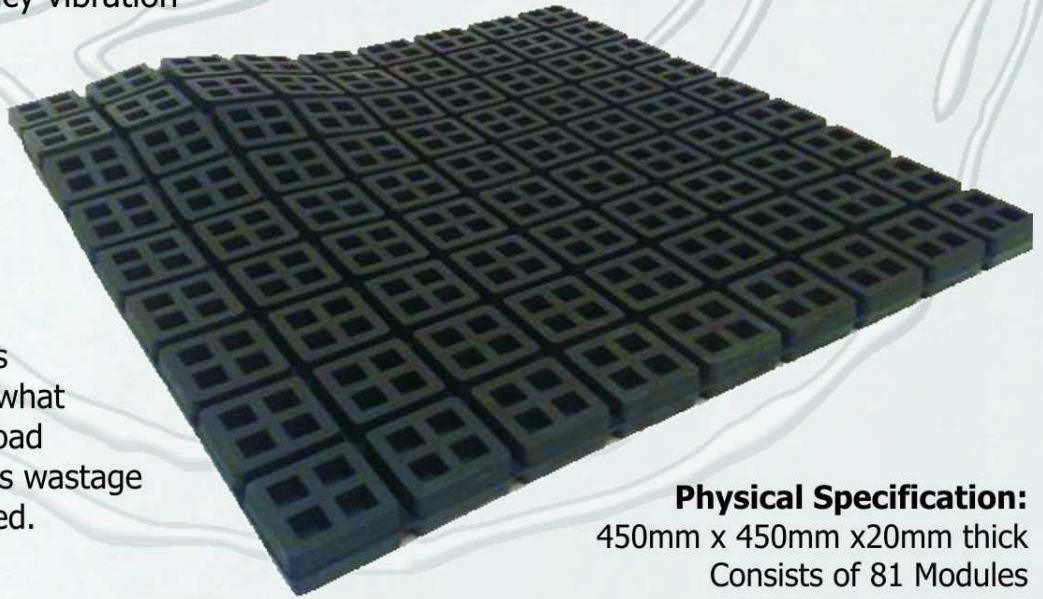


Physical Specification:

450mm x 450mm x 20mm thick
Consists of 81 Modules

Module size: 50mm x 50mm x 20mm thick

Available in Natural Rubber or Neoprene

Webbing between modules to allow easy cutting to size
Combinations in 50mm increments can be cut –
example 50mm x 100mm or 150mm x 200mm

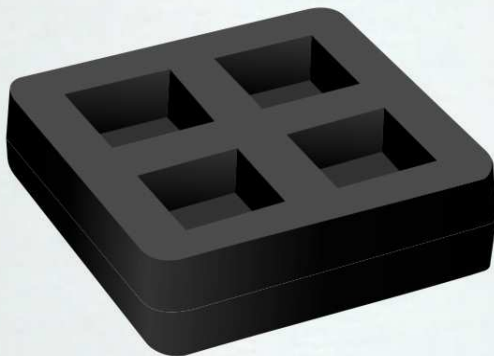

Single Module:

50mm x 50mm x 20mm

Load Ratings

Size	15% Deflection
50mm x 50mm (1Module)	80 kg
100mm x 100mm (4Modules)	320 kg
200mm x 200mm (16Modules)	1280 kg
450mm x 450mm (81Modules)	6480 kg

Vibrasorb SW Pads are Moulded in:

Natural Rubber – Maximum resilience and Anti-Vibration Isolation.

Neoprene – Longer life span with excellent oil resistance.

DURBAN
039 315 5306

JOHANNESBURG (Head Office)
011 908 4616
www.sndsa.co.za

CAPE TOWN
021 914 4206