


CONE MOUNTS



Cone Mounts are designed to work in both shear and compression. The Cone Mountings consist of an inner and outer metal cone and are supplied with stop and centering washers. These washers prevent deformation under extreme compression or tensile stresses providing the mounting with a failsafe mechanism. The washers also protect the natural rubber from ozone and dripping oil.

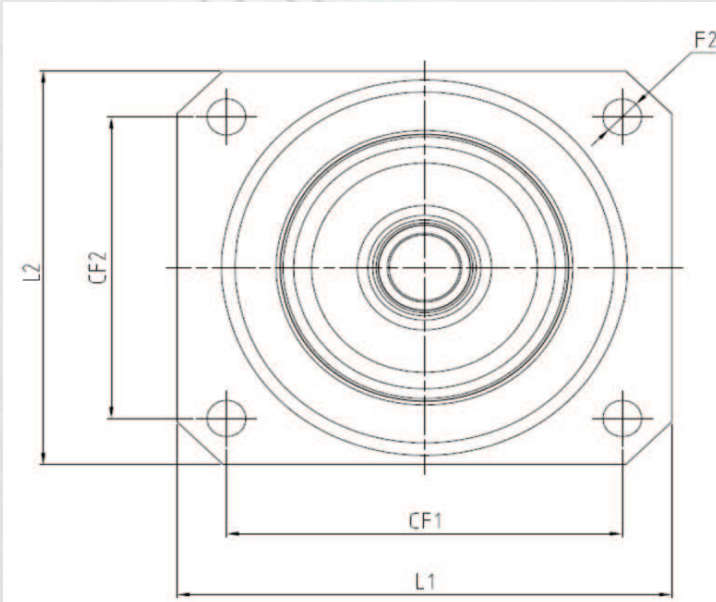


Technical Characteristics

- Load ratings from 160kg - 1850kg.
- Designed to work in both shear and compression.
- Compact design with high load capacity.
- Failsafe Protection.
- Zinc plated to protect against corrosion.

Max Load Ratings (kg)

	45shore	60shore	70shore
CN 78	160	350	488
CN 93	450	840	1410
CN109	450	1125	1850

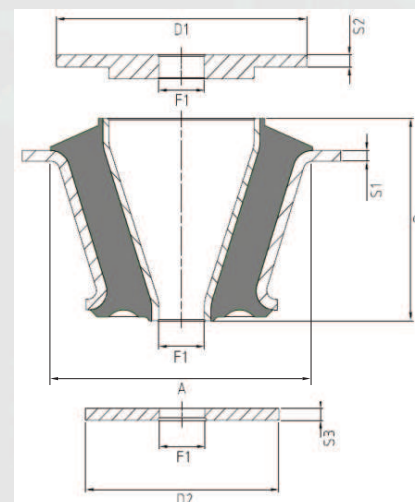

Applications

- Gensets
- Engines
- Chassis
- Compressors
- Pumps
- Cab Mountings

Item	Cone									Washers		
	A	B	CF1	CF2	F1	F2	S1	L1	L2	D2	S2	S3
CN 78	78	50	80	65	16	11	4	107	90	65	4	4
CN 93	93	73	90	74	16	11	4	120	100	70	5	4
CN 109	109	85	112	92	20	11	4.5	140	120	85	5	5

DURBAN
039 315 5306

JOHANNESBURG (Head Office)
011 903 4616
www.sndsa.co.za

CAPE TOWN
021 914 4206