

CIRCULAR Mount Range






In our experience, the following circular mountings are the most commonly used. The parts listed below are usually ex stock.

Please note FT is for female thread

Part No	D(mm)	H(mm)	d	l(mm)	l(mm)	Shore	Load Kg	Deflection mm
01-4-10/10A	10	10	M4	10	10	60	5	0.8
22-6-20/20A	20	20	M6	20	20	60	16	1.9
22-6-20/FTB	20	20	M6	20	FT	60	16	1.9
22-6-FT/FTC	20	20	M6	FT	FT	60	16	1.9
252-6-20/20A	25	20	M6	20	20	60	25	1.8
32-8-25/25A	30	20	M8	25	25	60	40	1.6
325-8-25/25A	30	25	M8	25	25	60	40	2
43-8-16/16A	40	30	M8	16	16	45	42	3
43-8-20/40A	40	30	M8	20	40	45	42	3
43-8-20/50A	40	30	M8	20	50	45	42	3
43-8-30/FTA	40	30	M8	30	FT	45	42	3
43-8-FT/FTC	40	30	M8	FT	FT	45	42	3
43-10-20/20A	40	30	M10	20	20	45	42	3
43-10-20/50A	40	30	M10	20	50	45	42	3
43-10-30/FTA	40	30	M10	30	FT	45	42	3
43-10-FT/FTC	40	30	M10	FT	FT	45	42	3
53-10-30/30A	50	30	M10	30	30	60	156	2.6
53-10-30/FTA	50	30	M10	30	FT	60	156	2.6
53-10-FT/FTC	50	30	M10	FT	FT	60	156	2.6
54-10-30/30A	50	40	M10	30	30	60	115	4
55-10-30/30A	50	50	M10	30	30	60	100	4.8
64-10-30/30A	60	40	M10	30	30	60	171	3
64-10-30/FTB	60	40	M10	30	FT	60	171	3
75-12-40/40A	75	50	M12	40	40	60	250	3.5
75-12-40/FTB	75	50	M12	40	FT	60	250	3.5
75-12-FT/FTC	75	50	M12	FT	FT	60	250	3.5
15-16-40/40A	100	50	M16	40	40	60	550	4.2
15-16-40/FTB	100	50	M16	40	FT	60	550	4.2
15-16-FT/FTC	100	50	M16	FT	FT	60	550	4.2
145-16-50/50	145	70	M16	50	50	60	966	9.5
160-16-50/50	160	70	M16	50	50	60	1520	8.9

* Enquire for other available stock sizes

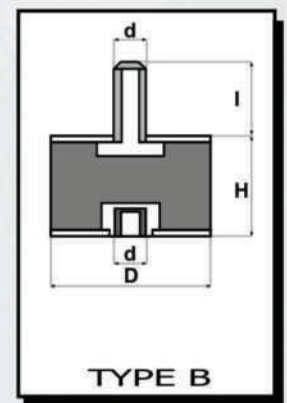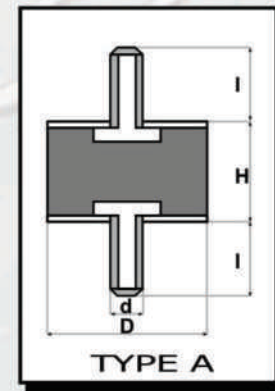

DURBAN
039 315 5306

JOHANNESBURG (Head Office)
011 908 4616
www.sndsa.co.za

CAPE TOWN
021 914 4206